


- 1. Disconnect the battery before beginning installation
- 2. Select a location to mount the panel. The panel plate can be used as a template if desired.
- 3. Before installing the panel, insert all switches from the front and circuit breakers from the back into the switch panel.
- 4. (ONLY IF USB IS SUPPLIED IN THE KIT). After inserting the USB charger into the panel take the rectangular aluminum spacer and install it on the back side of the switch panel over the USB charger. This will make it more rigid once assembled (see image below).
- 5. Using the supplied connectors, wire each switch to the accessory it will control. The use of 12 gauge wire is recommended (See wiring diagram below).
- 6. Apply the appropriate accessory label under each switch.
- 7. Install the switch panel in the desired location.
- 8. Reconnect the battery

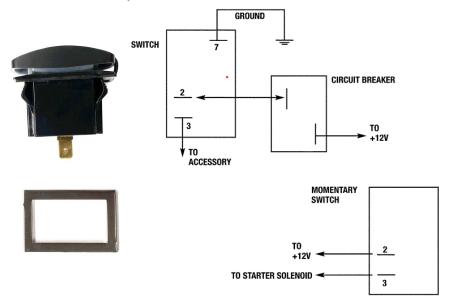

For Technical Assistance, Call Moroso's Tech Line at (203) 458-0542,458-0546 8:30am – 5:00pm Eastern Time

MOROSO PERFORMANCE PRODUCTS, INC 80 CARTER DR • GUILFORD, CT 06437 Phone: (203) 453-6571 • Fax: (203) 453-6906