



Parts List



- (1) TANK BODY
- (1) BILLET CLAMP
- (1) BALL VALVE
- (1) 90 DEGREE DRAIN
- (1) STAINLESS STEEL MOUNTING BRACKET
- (2) 90 DEGREE BARBED FITTINGS
- (2) LENGTHS OF 1/2" TUBE
- (1) DRAIN CAP
- (2) 1/4 X 20 SHCS X 5/8
- (1) 1/4 X 20 SHCS X 1


For Technical Assistance, call Moroso's Tech Line
(203)-458-0542, 8:30am-5:00pm Eastern Time
MOROSO PERFORMANCE PRODUCTS, INC.

80 CARTER DRIVE
GUILFORD, CT 06437

www.moroso.com



Step 1: If vehicle is equipped with strut tower brace remove.

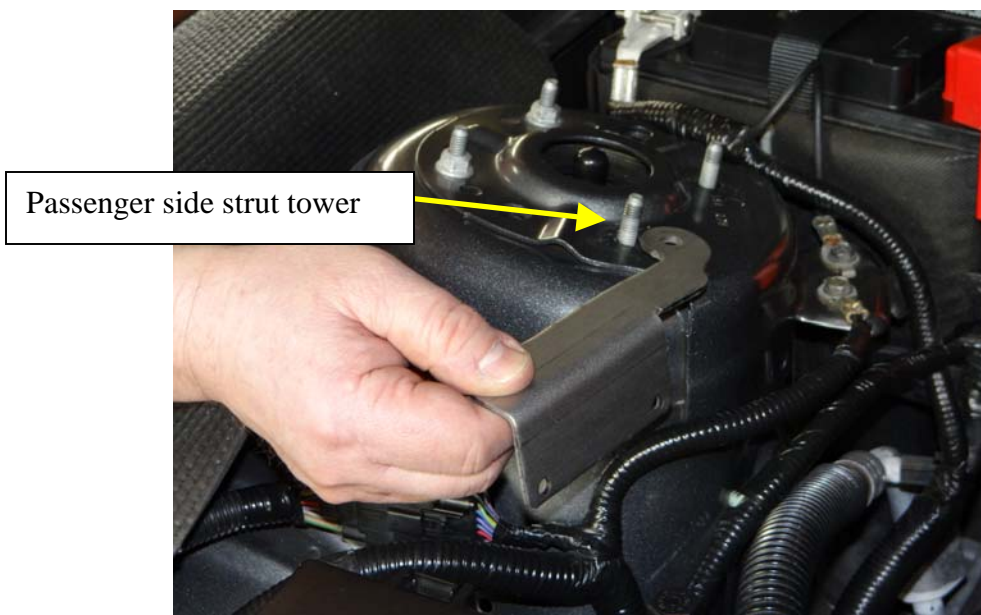


Step 2: Place mounting bracket over stud shown for vehicles with and without strut tower brace. (Vehicles without strut tower brace remove nut and install mounting bracket)

For Technical Assistance, call Moroso's Tech Line
(203)-458-0542, 8:30am-5:00pm Eastern Time
MOROSO PERFORMANCE PRODUCTS, INC.

80 CARTER DRIVE
GUILFORD, CT 06437

www.moroso.com

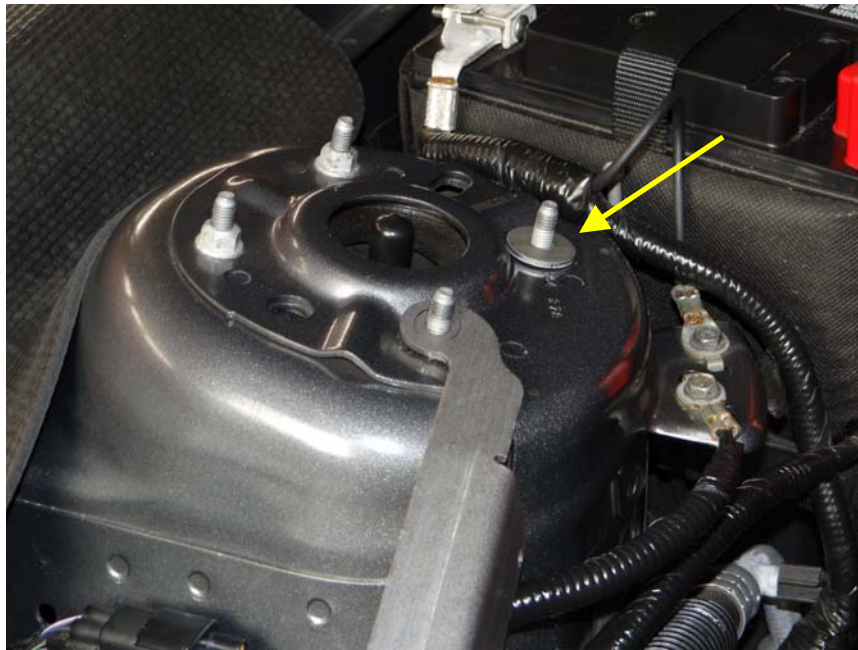

Step 3: For vehicles equipped with strut tower brace install (3) 1/8" spacers as shown.



For Technical Assistance, call Moroso's Tech Line
(203)-458-0542, 8:30am-5:00pm Eastern Time
MOROSO PERFORMANCE PRODUCTS, INC.

80 CARTER DRIVE
GUILFORD, CT 06437

www.moroso.com



Step 4: Re-install strut tower brace if applicable.



Step 5: All vehicles tighten nut-securing bracket as shown.

For Technical Assistance, call Moroso's Tech Line
(203)-458-0542, 8:30am-5:00pm Eastern Time
MOROSO PERFORMANCE PRODUCTS, INC.

80 CARTER DRIVE
GUILFORD, CT 06437

www.moroso.com




Step 6: Locate PCV tube and remove from vehicle.



For Technical Assistance, call Moroso's Tech Line
(203)-458-0542, 8:30am-5:00pm Eastern Time
MOROSO PERFORMANCE PRODUCTS, INC.

80 CARTER DRIVE
GUILFORD, CT 06437

www.moroso.com

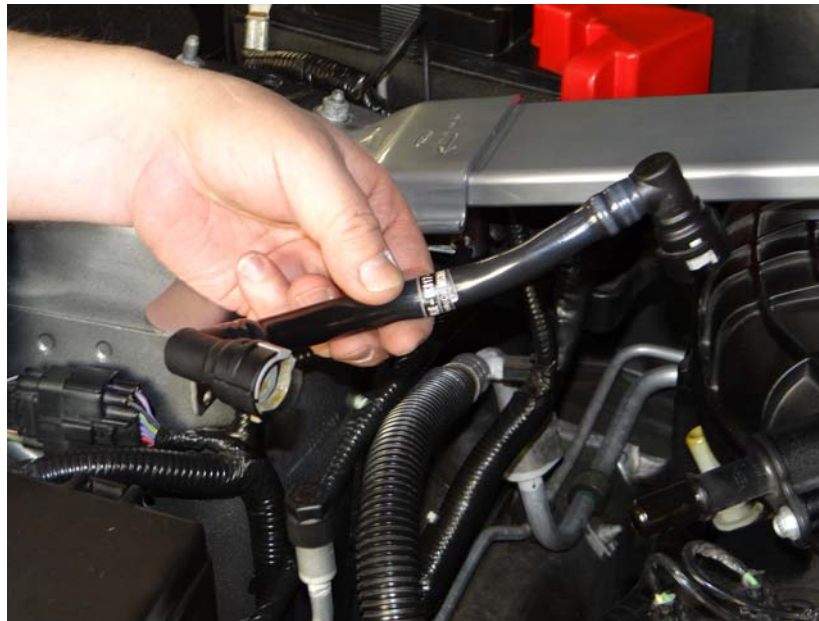

Step 7: Cut plastic tubing from 90 degree fitting on both ends of PCV line.

For Technical Assistance, call Moroso's Tech Line
(203)-458-0542, 8:30am-5:00pm Eastern Time
MOROSO PERFORMANCE PRODUCTS, INC.

80 CARTER DRIVE
GUILFORD, CT 06437

www.moroso.com



For Technical Assistance, call Moroso's Tech Line
(203)-458-0542, 8:30am-5:00pm Eastern Time
MOROSO PERFORMANCE PRODUCTS, INC.
80 CARTER DRIVE
GUILFORD, CT 06437
www.moroso.com



Note: Retain (2) 90 degree fittings and discard plastic tube.

For Technical Assistance, call Moroso's Tech Line
(203)-458-0542, 8:30am-5:00pm Eastern Time

MOROSO PERFORMANCE PRODUCTS, INC.

80 CARTER DRIVE

GUILFORD, CT 06437

www.moroso.com



Step 8: Re-install 90 degree fitting in original location.




For Technical Assistance, call Moroso's Tech Line
(203)-458-0542, 8:30am-5:00pm Eastern Time
MOROSO PERFORMANCE PRODUCTS, INC.

80 CARTER DRIVE
GUILFORD, CT 06437

www.moroso.com



Step 9: Install 1/4-20 x 1" SHCS into billet clamp as shown.

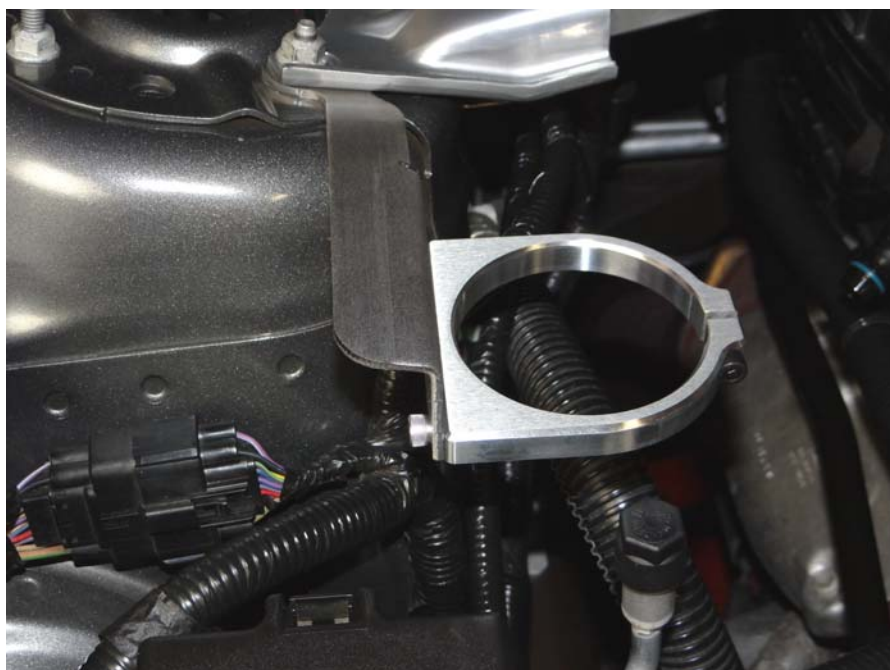

Step 10: Mount billet clamp to stainless mounting bracket and tighten using (2) 1/4-20 x 5/8" SHCS.

For Technical Assistance, call Moroso's Tech Line
(203)-458-0542, 8:30am-5:00pm Eastern Time
MOROSO PERFORMANCE PRODUCTS, INC.

80 CARTER DRIVE
GUILFORD, CT 06437

www.moroso.com



Step 11: Assemble Air Oil Separator as shown using Teflon tape on all fittings.



Note: Orientation of drain fitting.

For Technical Assistance, call Moroso's Tech Line
(203)-458-0542, 8:30am-5:00pm Eastern Time
MOROSO PERFORMANCE PRODUCTS, INC.

80 CARTER DRIVE
GUILFORD, CT 06437

www.moroso.com



Step 12: Install Air Oil Separator in billet clamp and tighten with fittings facing towards engine.



For Technical Assistance, call Moroso's Tech Line
(203)-458-0542, 8:30am-5:00pm Eastern Time
MOROSO PERFORMANCE PRODUCTS, INC.

80 CARTER DRIVE
GUILFORD, CT 06437

www.moroso.com



Step 13: Install 10" long hose to valve cover fitting as shown.



Step 14: Install other end to Air Oil Separator as shown.

For Technical Assistance, call Moroso's Tech Line
(203)-458-0542, 8:30am-5:00pm Eastern Time
MOROSO PERFORMANCE PRODUCTS, INC.

80 CARTER DRIVE
GUILFORD, CT 06437

www.moroso.com



Step 15: Install 8 1/4" long hose to intake fitting as shown.




Step 15: Install other end to Air Oil Separator as shown.

For Technical Assistance, call Moroso's Tech Line
(203)-458-0542, 8:30am-5:00pm Eastern Time
MOROSO PERFORMANCE PRODUCTS, INC.

80 CARTER DRIVE
GUILFORD, CT 06437

www.moroso.com

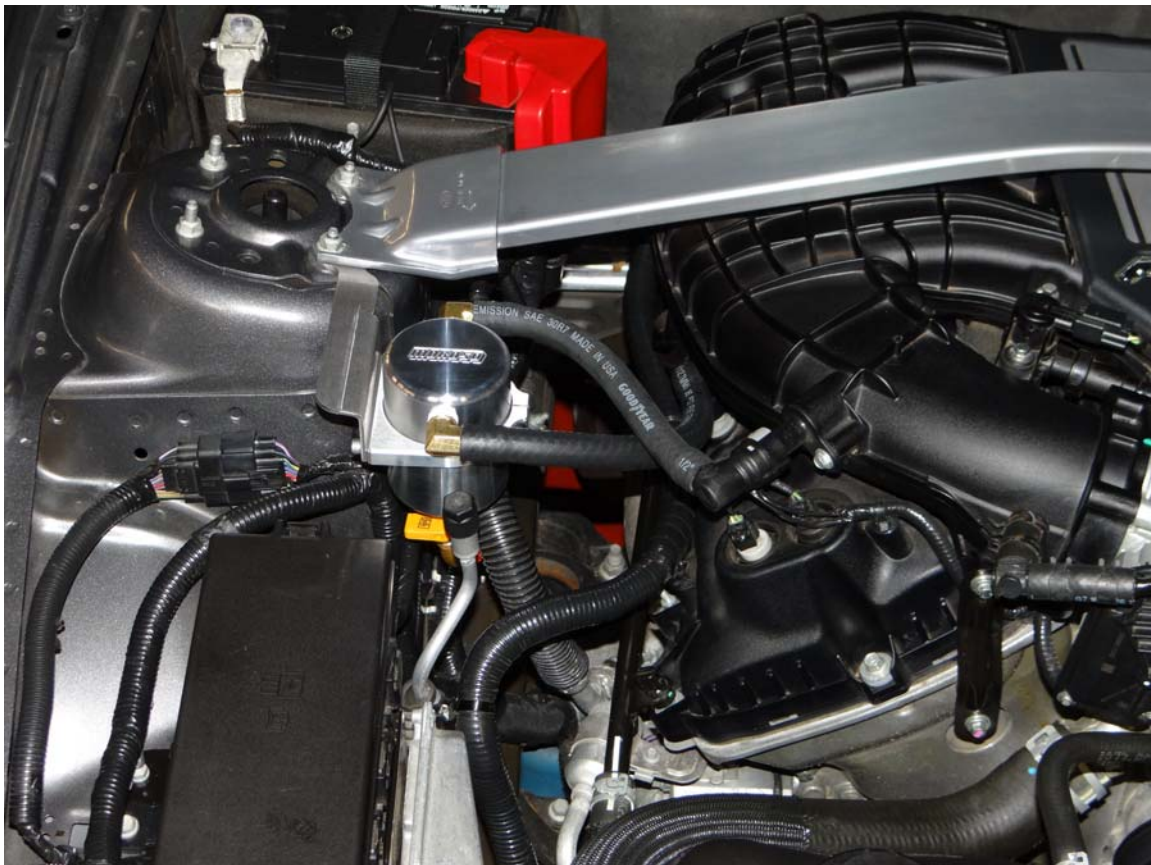

Installation Complete

Draining of Air Oil Separator is needed; this will depend on driving conditions (i.e.) normal day to day driving check every 1,000 miles until a baseline is established. A good baseline is to drain the Air Oil Separator when it is about HALF full. This will vary with temperatures (cold winters vs. hot summers). For track usage Air Oil Separator will need to be drained after every outing.

There are several different methods to draining Air Oil Separator. The first and simplest method is to place a cup or MOROSO part # 65805 under drain elbow and open ball valve, once draining is complete close ball valve. The second method is to run a length of ½" hose from elbow to under carriage of vehicle and place drain pan under vehicle at this time open ball valve, when draining is complete close ball valve. This hose may also be permanently installed for future draining.

For Technical Assistance, call Moroso's Tech Line
(203)-458-0542, 8:30am-5:00pm Eastern Time
MOROSO PERFORMANCE PRODUCTS, INC.

80 CARTER DRIVE
GUILFORD, CT 06437

www.moroso.com