



**MOROSO P/N 65230 IN-LINE FUEL FILTER 1/2"
NO. 8 FITTING**
**MOROSO P/N 65234 IN-LINE FUEL FILTER 5/8"
NO. 10 FITTING**


This is **NOT** recommended for high-pressure fuel injection systems.

Replacing the Filter:

1. Loosen the AN fittings and remove the In-Line Filter Housing.
2. Remove the Filter Screen from the housing and proceed to step 1 of the **Cleaning** process.
3. Check all the O-rings and verify they are not damaged in any way. If damaged, purchase new ones and proceed to step 4.
4. Re-Install O-ring (E) onto the filter screen.
5. Re-Install the filter screen into the filter housing as shown in the image below.
6. Install O-rings (D) against the machined ledge on the AN fittings.
7. Tighten the fittings until snug to prevent potential leaks.

Cleaning:

1. Remove the O-ring from the filter screen.
2. Using an air compressor, spray the inside of the filter housing and filter screen until clean.
3. Return to step 3 of **Replacing the Filter**.

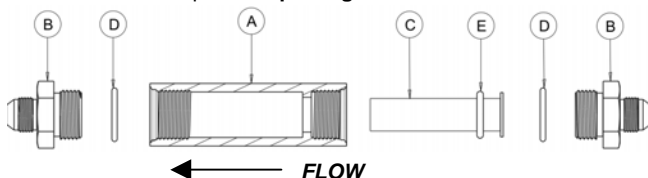

ITEM	DESCRIPTION	QTY
A	IN-LINE FILTER HOUSING	1
B	FITTING, IN-LINE FILTER	2
C	40 MICRON SS FILTER SCREEN	1
D	O-RING 0.924 ID 0.116 3-912 BU	2
E	O-RING 0.734 ID 0.139 2-210 BU	1

Replacement screens are available from Moroso as P/N 97050

**For Technical Assistance, Call Moroso's Tech Line at
(203) 458-0542, 458-0546 8:30am – 5:00pm Eastern Time**

MOROSO PERFORMANCE PRODUCTS, INC

80 CARTER DR • GUILFORD, CT 06437

Phone: (203) 453-6571 • Fax: (203) 453-6906

Visit Us At www.moroso.com